

Datesheet


| | |
|--------------|--------------|
| Item Number | GF532RA6 |
| Product Type | Panel Socket |
| Manufacturer | Cantell I |



Property

Panel Socket

- 20 ° inward tilt
- Screw-clamp Terminal
- IP44
- V-0 Flame Rating



Product images (for reference only)

Product Specification

Panel Socket 30 Amp 3P+N+G 200/380V - 240/415Vac, 5 Wire Plug with Pilot Pin
 32 Amp 3P+N+G 200/380V - 240/415Vac, 5 Wire Plug with Pilot Pin

UL to UL Standards 1682,1686;RoHS Compliant;IEC 60309-1; IEC 60309-2

Manufactured from PA66

Add bromine series flame retardants

Flange Size: 100 × 92 mm

The size of the installation hole position is 85 × 77mm

Specification description

| | |
|-----------------------------------|------------------------|
| Current intensity | 30A/32A |
| Poles | 5 |
| Voltage parameter | 380V/415V~ (50+60Hz) |
| Clock position | 6 h |
| Color | Red |
| Protection type | IP44 |
| Connection technology | Screw terminals |
| Materials | PA66 |
| Flange vertical dimension | 100mm |
| Flange horizontal dimension | 92mm |
| Installation vertical distance | 85 mm |
| Installation horizontal dimension | 77mm |


Qualification certification

| | |
|-------------------|---|
| UL Certification |  |
| CQC Certification |  |
| CE Certification | CE |
| CB Certification | CB |
| RoSH |  |

Packaging parameters

| | |
|---------------------------|----------|
| Ordering unit | Pcs |
| HS Code | 85366990 |
| Net weight | 0,29kg |
| Number of pieces per box | 10 |
| Packaging length | 0,31m |
| Packaging width | 0,195m |
| Packaging depth | 0,15m |
| Gross weight of packaging | 3,1kg |

Drawing

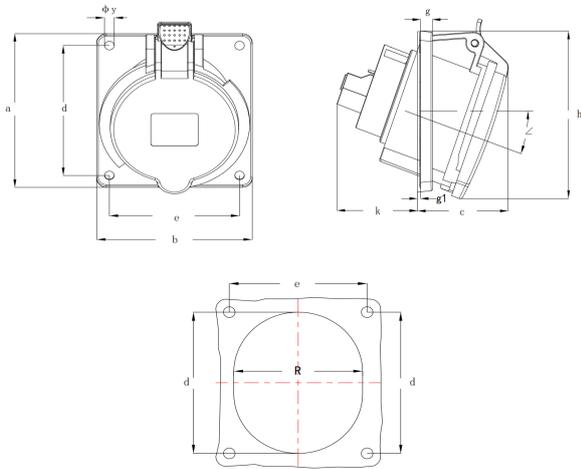

| mm | A | 32 | | |
|---|-----|-----|-----|-----|
| | p | 3 | 4 | 5 |
| a | 100 | 100 | 100 | 100 |
| b | 92 | 92 | 92 | 92 |
| c | 59 | 59 | 59 | 59 |
| d | 85 | 85 | 85 | 85 |
| e | 77 | 77 | 77 | 77 |
| y | 5.5 | 5.5 | 5.5 | 5.5 |
| g | 8 | 8 | 8 | 8 |
| g1 | 2 | 2 | 2 | 2 |
| h | 104 | 104 | 104 | 104 |
| k | 49 | 49 | 49 | 49 |
| R | 67 | 67 | 72 | 72 |
| | 20° | 20° | 20° | 20° |
| Cross-sectional area of the wire (mm ²) | 2.5 | 2.5 | 2.5 | 2.5 |
| From the smallest to the largest | -10 | -10 | -10 | -10 |