


## Datesheet


Item Number	GF563P6
Product Type	Plug
Manufacturer	Cantell I

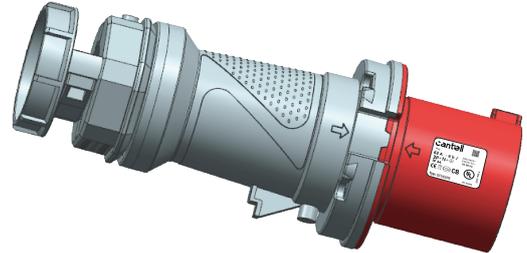

### Property

#### Plug

- Screw-clamp Terminal
- IP44
- V-0 Flame Rating



Product images (for reference only)

### Product Specification

Plug 60 Amp 3P+N+G 200/380V - 240/415Vac, 5 Wire Plug with Pilot Pin  
 63 Amp 3P+N+G 200/346V - 240/415Vac, 5 Wire Plug with Pilot Pin

 to UL Standards 1682; 1686  
 RoHS Compliant; IEC 60309-1; IEC 60309-2  
 Manufactured from PA66

Add bromine series flame retardants

### Specification description

Current intensity	60A/63A
Poles	5
Voltage parameter	380V/415V~ ( 50+60Hz )
Clock position	6 h
Color	Red
Protection type	IP44
Connection technology	Screw terminals
Materials	PA66
Minimum cord range	15.2mm(0.6")
Maximum cord range	36.8mm(1.45")
Fire protection grade of cable contact surface	V0
Fire protection grade of the enclosure	V0

---

## Qualification certification

---

UL Certification	
CQC Certification	
CE Certification	<b>CE</b>
CB Certification	<b>CB</b>
RoSH	


---

## Packaging parameters

---

Ordering unit	Pcs
HS Code	8536909000
Net weight	0,83kg
Number of pieces per box	5
Packaging length	0,31m
Packaging width	0,25m
Packaging depth	0,15m
Gross weight of packaging	4.3kg

## Drawi ng

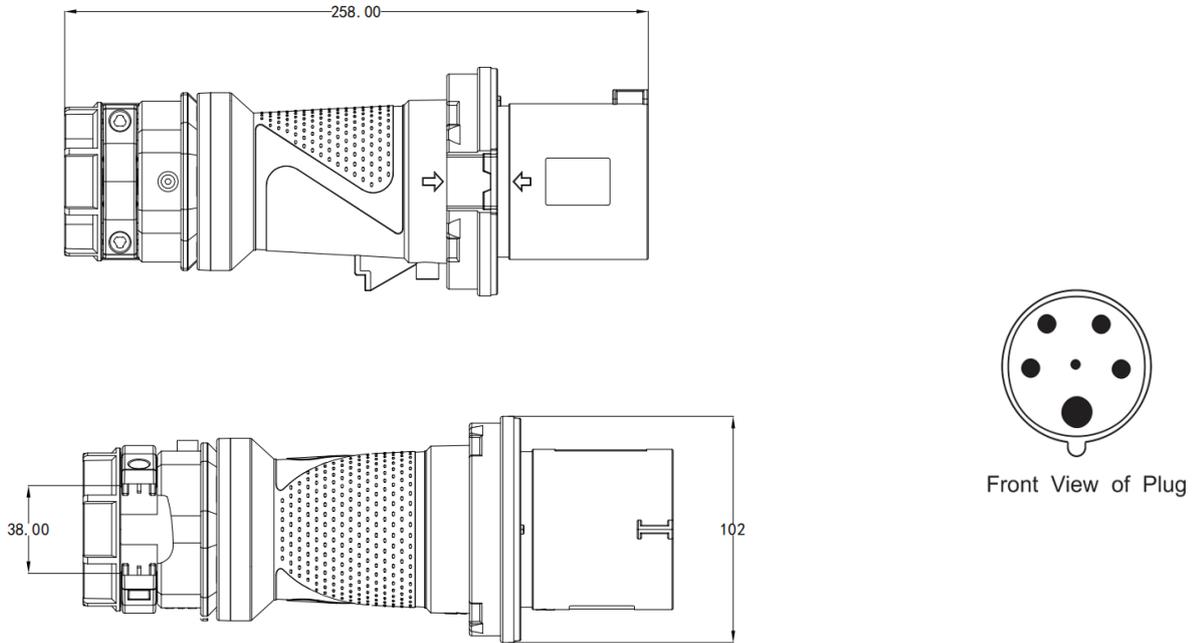

**Wire Range:#8 - #4**

**Pilot Pin: 14 AWG**

**Cord Range:15.2mm(0.6") - 36.8mm(1.45")**

**Threaded Cable Entry:1 1/2" NPT**