

## Datesheet

Item Number GF532C6W


Product Type Connector

Manufacturer Cantell I

### Property

#### Connector

- Screw-clamp Terminal
- IP67
- V-0 Flame Rating



Product images (for reference only)

### Product Specification

Connector 30 Amp 3P+N+G 200/380V - 240/415Vac, 5 Wire Plug with Pilot Pin  
 32 Amp 3P+N+G 200/346V - 240/415Vac, 5 Wire Plug with Pilot Pin

 to UL Standards 1682; 1686  
 RoHS Compliant; IEC 60309-1; IEC 60309-2  
 Manufactured from PA66

Add bromine series flame retardants

### Specification description

Current intensity	30A/32A
Poles	5
Voltage parameter	380V/415V~ ( 50+60Hz )
Clock position	6 h
Color	Red
Protection type	IP67
Connection technology	Screw terminals
Materials	PA66
Minimum cord range	10.9mm(0.43")
Maximum cord range	28.5mm(1.12")
Fire protection grade of cable contact surface	V0

## Qualification certification

---


UL Certification	
CQC Certification	
CE Certification	<b>CE</b>
CB Certification	<b>CB</b>
RoSH	
TUV	

## Packaging parameters


---

Ordering unit	Pcs
HS Code	8536909000
Net weight	0,38kg
Number of pieces per box	10
Packaging length	0,31m
Packaging width	0,25m
Packaging depth	0,15m
Gross weight of packaging	4.1kg

## Drawing

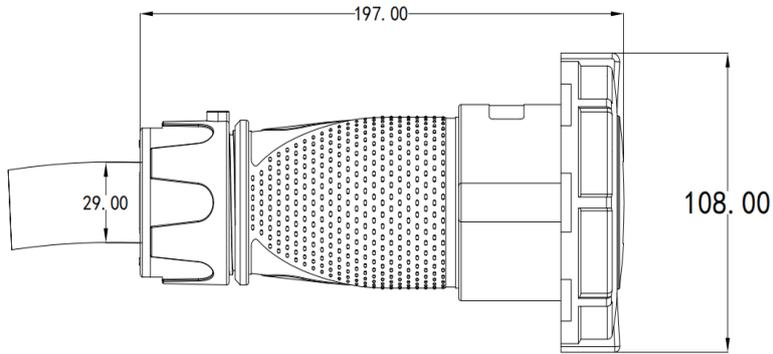

Front View of Connector

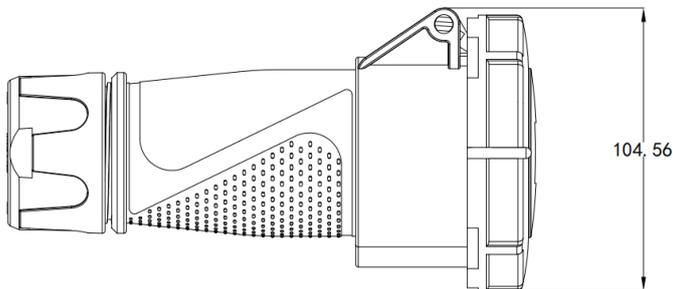

**Wire Range:#8 - #12 AWG**

**Cord Range:15.2mm(0.6") - 36.8mm(1.45")**

**Threaded Cable Entry:1 1/4" NPT**