

## Datesheet

Item Number	GF532P6W
Product Type	Plug
Manufacturer	Cantell I

### Property

#### Plug

- Screw-clamp Terminal
- IP67
- V-0 Flame Rating



Product images (for reference only)

### Product Specification

- Plug 30 Amp 3P+N+G 200/380V - 240/415Vac, 5 Wire Plug with Pilot Pin
- 32 Amp 3P+N+G 200/346V - 240/415Vac, 5 Wire Plug with Pilot Pin

-  to UL Standards 1682; 1686
- RoHS Compliant; IEC 60309-1; IEC 60309-2
- Manufactured from PA66

Add bromine series flame retardants

### Specification description

Current intensity	30A/32A
Poles	5
Voltage parameter	380V/415V~ ( 50+60Hz )
Clock position	6 h
Color	Red
Protection type	IP67
Connection technology	Screw terminals
Materials	PA66
Minimum cord range	10.9mm(0.43")
Maximum cord range	28.5mm(1.12")
Fire protection grade	V0

---

## Qualification certification

---

UL Certification	
CQC Certification	
CE Certification	<b>CE</b>
CB Certification	<b>CB</b>
RoSH	
TUV	



---

## Packaging parameters

---

Ordering unit	Pcs
HS Code	8536909000
Net weight	0,33kg
Number of pieces per box	10
Packaging length	0,31m
Packaging width	0,25m
Packaging depth	0,15m
Gross weight of packaging	3.6kg

## Drawing

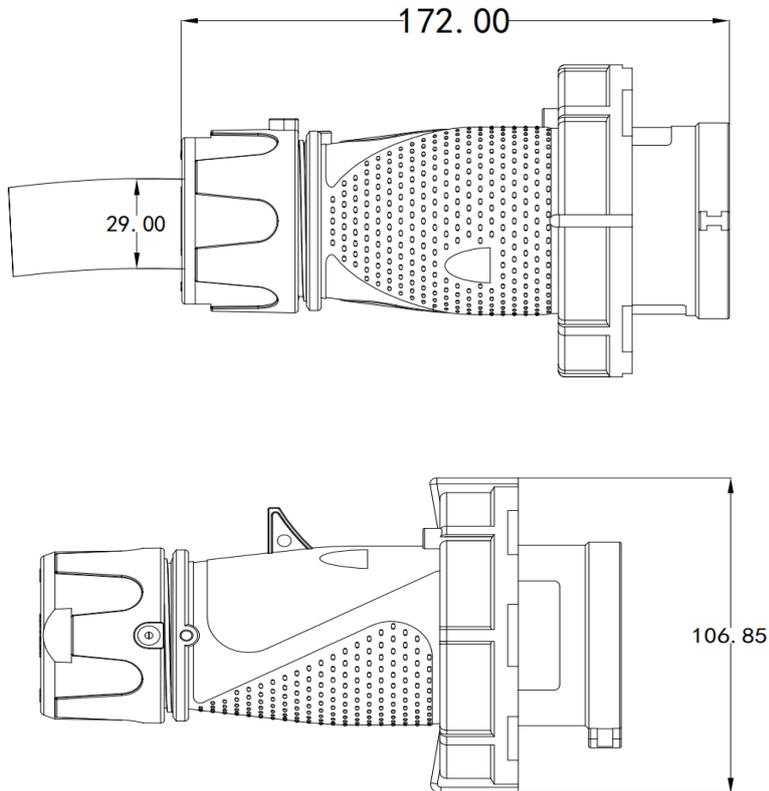

Front View of Plug

**Wire Range:#8 - #12 AWG**

**Cord Range:15.2mm(0.6") - 36.8mm(1.45")**

**Threaded Cable Entry:1 1/4" NPT**