

Datesheet


Item Number	GF532C6
Product Type	Connector
Manufacturer	Cantell I



Property

Connector

- Screw-clamp Terminal
- IP44
- V-0 Flame Rating



Product images (for reference only)

Product Specification

Connector 30 Amp 3P+N+G 200/380V - 240/415Vac, 5 Wire Plug with Pilot Pin
 32 Amp 3P+N+G 200/346V - 240/415Vac, 5 Wire Plug with Pilot Pin

- UL to UL Standards 1682; 1686
- RoHS Compliant; IEC 60309-1; IEC 60309-2
- Manufactured from PA66

Add bromine series flame retardants

Specification description

Current intensity	30A/32A
Poles	5
Voltage parameter	380V/415V~ (50+60Hz)
Clock position	6 h
Color	Red
Protection type	IP44
Connection technology	Screw terminals
Materials	PA66
Minimum cord range	10.9mm(0.43")
Maximum cord range	28.5mm(1.12")
Fire protection grade	V0


Qualification certification

UL Certification	
CQC Certification	
CE Certification	CE
CB Certification	CB
RoSH	
TUV	

Packaging parameters

Ordering unit	Pcs
HS Code	8536909000
Net weight	0,35kg
Number of pieces per box	10
Packaging length	0,31m
Packaging width	0,25m
Packaging depth	0,15m
Gross weight of packaging	3.8kg

Drawing

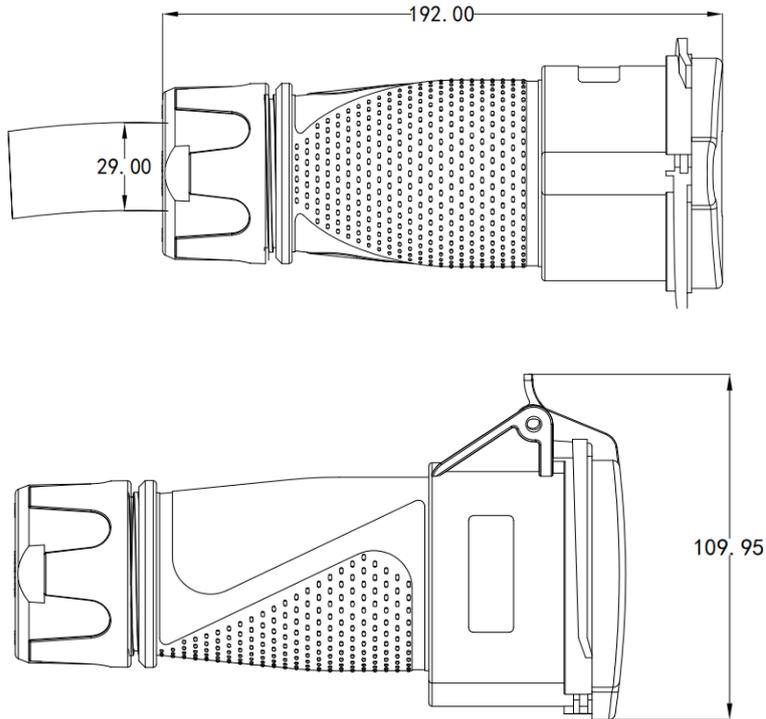

Front View of Connector

Wire Range:#8 - #12 AWG

Cord Range:15.2mm(0.6") - 36.8mm(1.45")

Threaded Cable Entry:1 1/4" NPT